


# Class II B2 Biological Safety Cabinet

Three protection: operator, sample and environment.

Airflow system: 0% air recirculation, 100% air exhaust.

A Class II B2 BSC, also called a total exhaust cabinet, is necessary when significant amounts of radionuclides and volatile chemicals are expected to be used.

Class II B2 Biological Safety Cabinet

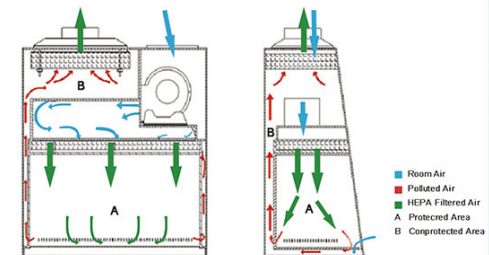

## Class II B2 Biological Safety Cabinet




**LCD Display**  
Large digital display is easy to monitor all the safety parameters at a glance and ergonomically sized control panel improves user interface.




**Work Zone**  
Work zone, made of 304 stainless steel, is surrounded by negative pressure.



**Remote Control**  
All functions can be realized with it, making the operation much easier and more convenient.



**UV Lamp**  
Emission of 253.7 nanometers for most efficient decontamination.



**Front Window**  
Two-layer laminated toughened glass >5mm, anti UV



**Footmaster Caster**  
Universal caster with brake and leveling feet



**Foot Switch**  
Adjust front window height by foot during experiment, to avoid airflow turbulence caused by arm movement.



**Waterproof Socket**  
2 waterproof sockets are located in the side wall, for optimum convenience of using small devices inside the cabinet.

## ADVANTAGE

1. Time reserve function.
2. Motorized front window.
3. HEPA filter life and UV life indicator.
4. Automatic air speed adjustable with filter block.
5. With memory function in case of power-failure.
6. Work area surrounded by negative pressure, it can ensure maximum safety in work area.
7. Most accessories are standard, which saves your money. There is no need to pay more.
8. Audio and visual alarm (filter replacement, window over height, abnormal air flow velocity, etc).
9. Remote control. All functions can be realized with it, making the operation much easier and more convenient.
10. Interlock function: UV lamp and front window; UV lamp and blower, fluorescent lamp; blower and front window
11. Foot switch. Adjust front window height by foot during experiment, to avoid airflow turbulence caused by arm movement.

## TECHNICAL PARAMETERS

Model	BSC-1100IB2-X	BSC-1300IB2-X	BSC-1500IB2-X	BSC-1800IB2-X
Internal Size (W*D*H)	940*600*660mm	1150*600*660mm	1350*600*660mm	1700*600*660mm
External Size (W*D*H)	1100*750*2250mm	1300*750*2250mm	1500*760*2250mm	1873*775*2270mm
Tested Opening	Safety Height 200mm(8")			
Max Opening	420 mm (17")	420 mm (17")	500mm (20")	480mm (20")
Inflow Velocity	0.53±0.025m/s			
Downflow Velocity	0.33±0.025m/s			
Pre-Filter	Washable			
HEPA Filter	Two, 99.999% efficiency at 0.3µm, filter life indicator.			
Front Window	Motorized, two-layer laminated toughened glass ≥ 5mm, anti UV			
Noise	NSF 49 ≤ 61dB / EN 12469 ≤ 58dB			
UV Lamp	30W*1	30W*1	40W*1	40W*1
	UV timer, UV life indicator, emission of 253.7 nanometers for most efficient decontamination.			
Illuminating Lamp	LED lamp			
	12W*2	14W*2	16W*2	16W*2
Illumination	≥1000Lux			
Consumption	700W	850W	900W	1200W
Waterproof Sockets	Two, total load of two sockets: 500W			
Display	LCD display: exhaust filter and downflow filter pressure, filter and UV lamp working time, inflow and downflow velocity, filter life, humidity and temperature, system working time etc.			
Control System	Microprocessor			
Airflow System	0% air re-circulation, 100% air exhaust			
Alarm	Abnormal airflow velocity; Filter replacement; Front window at unsafe height			
Exhaust Duct	4 meters PVC duct, Diameter:300mm			
Material	Work Zone: 304 stainless steel Main Body: Cold-rolled steel with anti-bacteria powder coating			
Work Surface Height	750mm			
Caster	Footmaster caster			
Power Supply	AC 220V±10%, 50/60Hz; 110V±10%, 60Hz (110V/60Hz is not applicable to BSC-1800IB2-X)			
Standard Accessory	Illuminating lamp, UV lamp*2, base stand, remote control, foot switch, exhaust blower, exhaust duct, drain valve, waterproof sockets*2, pipe strap*2			
Optional Accessory	Water and gas tap, Electric height adjustable base stand			
Gross Weight	246kg	276kg	302kg	408kg
Package	Main Body Exhaust Blower (W*D*H)	1230*990*1810mm 1460*1050*1800mm 970*810*630mm	1650*990*1810mm 1460*1050*1800mm 970*810*630mm	2000*950*1820mm 1460*1050*1800mm 970*810*680mm



WAGA Instrument (PVT) Ltd  
275/B, Railway Road, Maharagama. Sri Lanka.  
Fax: 0112088230 Fax: 0112088231 email: sales@wagagroup.lk