



## ***Class II Legal-for-Trade Portable Balances Ideal for Jewelry Weighing***

Designed for a wide range of regular and trading applications, the Class II certified SJX Carat and Gold balances are ideal for weighing jewelry, precious metals, gemstones etc. Equipped with superior overload protection, large backlit display, fast stabilization time, multiple weighing units, application modes and connectivity options, these slim balances offer a truly user-friendly weighing experience.

### ***Standard Features:***

- Multiple connectivity options are available for easy data logging and communication. An optional auxiliary display can also be installed for retail applications.
- Manual internal calibration allows easy calibration as Class II Legal-for-Trade, ensuring precision of the balance.
- Advanced weighing technology ensures reliable, repeatable weighing results.

Supply & Distributed By:



[WWW.WAGAGROUP.LK](http://WWW.WAGAGROUP.LK)

**WAGA Instrument (PVT) Ltd**

275/B, Railway Road, Maharagama. Sri Lanka

+94 112 088 230 / +94 112 088 231

sales@wagagroup.lk

# SCOUT® SJX Jewelry Scale

## Large LCD Display

The large backlit LCD display of the slim Scout provides operators a clear view of their weighing results. An optional auxiliary display can also be installed easily to provide additional weight notifications to customers in retail environments.

Scout has multiple connectivity options for convenient data logging and communication, as well as connecting to an auxiliary display. Options include - RS232, USB Host, USB Device, Ethernet and Bluetooth®\*. With the USB Host option, you can simply save and transfer data from the balance to a USB drive. The Bluetooth option allows you to wirelessly operate the balance via a mobile device or tablet for Android™\*\*.



## Class II Approved Models

Approved models meet or exceed Class II accuracy requirements, making the new Scout ideal for commercial applications where reliability and precision are essential.

The Ingenious "Pull & Push" feature makes it easy to calibrate the balance manually. Regular calibration can ensure the balance's weighing performance, even in commercial trading mode. The balance is equipped with internal integral stainless steel weight which means that users don't need to worry about misplacing or finding extra space to store external masses.



## Better Performance

Stabilization time as fast as one second and high resolution load cell with up to 150,000d resolution and readability to 0.001g, deliver extremely quick, precise and repeatable weighing results.

## Superior Overload Protection

The superior mechanical overload protection system of the Scout is comprised of a high-strength stainless steel pan and an impact-resistant plastic pan support. This enables the balance to safely withstand loads up to ten times its rated capacity.



## Draftshield Model Available

Scout's ingenious draftshield (1mg model only) was designed with an easy to remove top cover piece. This serves as a wind protection ring which keeps the weighing surface stable in rough environments, while maintaining weighing speed.



## Built-in Application Modes


- **Weighing**—Determines the weight of items on the pan in the selected unit of measure.
- **Parts Counting**—Counts the number of pieces on the pan using a uniform weight.
- **Percent Weighing**—Measures the weight of a sample displayed as a percentage of a pre-established reference weight.
- **Checkweighing**—Compares the weight of a sample against target limits.
- **Totalization**—Measures cumulative weight of multiple items. Cumulative total may exceed the balance's capacity.
- **Density Determination**—Determines density of solids or liquid. With the integrated weigh below hook, it is possible to perform specific gravity tests for objects that cannot be easily placed on the weighing pan.
- **Display Hold**—Manually holds the last stable weight or the first highest stable weighing value on the display.

\* The Bluetooth word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by OHAUS is under license.

\*\*Android is a trademark of Google Inc.



**Draftshield**  
Protects the sample from external influences, increasing the speed and repeatability of measurements



**Calibration**  
Scout SJX models feature a calibration tab for easy manual internal calibration



**Connectivity**  
Expanded connectivity options include RS232, USB Host, USB Device, Ethernet and Bluetooth®



**Security Slot**  
Integrated security slot prevents theft



**Large Backlit LCD Display**  
High contrast LCD Display shows weight and application data clearly, even in poor lighting conditions




**Weigh Below Hook**  
A weigh below hook on the bottom of the Scout allows for density determination or specific gravity calculations  
SJX—Integrated  
SJX/E—Included (SJX/E hook shown)



**Lockswitch**  
The Scout can be locked into a specific configuration using the lockswitch

**Outline Dimensions**

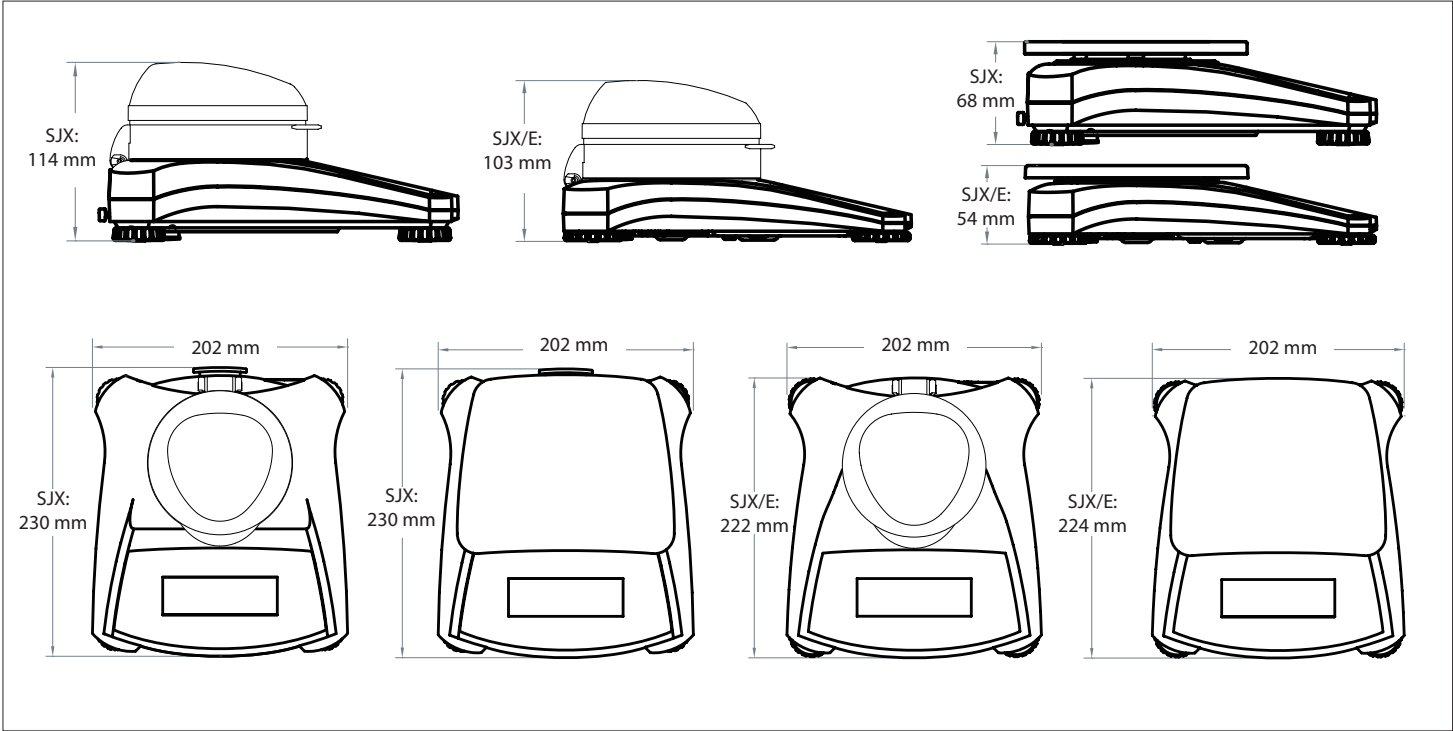

# SCOUT® SJX Jewelry Scale

## Approved Models

Internal Calibration Model	SJX323	/	SJX622	SJX1502	/	/	SJX6201	/	SJX323M	SJX622M	SJX1502M	SJX6201M	
External Calibration Model	SJX323/E	SJX322/E	SJX622/E	SJX1502/E	SJX621/E	SJX3201/E	SJX6201/E	SJX8200/E	/	/	/	/	
Capacity × Readability (g)	64 × 0.001	320 × 0.01	620 × 0.01	1500 × 0.01	620 × 0.1	3200 × 0.1	6200 × 0.1	8200 × 1	64 × 0.001	620 × 0.01	1500 × 0.01	6200 × 0.1	
Capacity × Readability (ct)	320 × 0.005	1600 × 0.05	3100 × 0.05	7500 × 0.05	3100 × 0.5	16000 × 0.5	31000 × 0.5	41000 × 5	320 × 0.01	3100 × 0.5	7500 × 0.5	31000 × 5	
Verification Interval e	N/A								0.1 ct (0.01 g)	0.1 g		1 g	
Class	N/A								II				
Repeatability (Std. Dev.) (g)	0.002	0.01		0.02	0.1			1	0.002	0.01	0.02	0.1	
Linearity (g)	0.003	0.01	0.02	0.03	0.1		0.2	1	0.003	0.02	0.03	0.2	
Span Calibration Mass*	50 g	200 g	300 g	1.5 kg	300 g	3 kg	5 kg	8 kg	50 g	300 g	1.5 kg	5 kg	
Linearity Calibration Mass	30, 60 g	200, 300 g	300, 600 g	1 kg, 1.5 kg	300, 600 g	1.5 kg, 3 kg	3 kg, 6 kg	4 kg, 8 kg	30, 60 g	300, 600 g	1 kg, 1.5 kg	3 kg, 6 kg	
Stabilization Time (s)	1.5	1		1.5	1				1.5	1	1.5	1	
Construction	ABS housing & stainless steel pan												
Draftshield	Yes	No							Yes	No			
Calibration	SJX/E: User-selectable external span or linearity calibration/Digital with external weight SJX: Manual internal calibration								Manual internal calibration				
Tare Range	Full capacity by subtraction												
Weighing Units	g, kg, ct, oz, ozt, dwt, lb, grm, hkt, sgt, twt, tical, tola								g, kg, ct				
Application Modes**	Weighing, Parts Counting, Percent Weighing, Check Weighing, Totalization, Density Determination, Display Hold												
Power Requirement	AC adapter (included) or 4 AA batteries (not included)												
Typical Battery Life	80 hours				120 hours	80 hours		120 hours	80 hours				
Communication	RS232, USB Host, USB Device, Ethernet or Bluetooth (available as an accessory, compatible only with Android OS device)												
Display Type	Liquid crystal display (LCD) with backlight												
Display Size	20 mm digits												
Overload Capacity	10 times rated capacity												
Operating Temperature Range	10 °C to 40 °C at 10% to 80% relative humidity, non-condensing								10 °C to 30 °C at 10% to 80% relative humidity, non-condensing				
Storage Conditions	-20 °C to 55 °C at 10% to 90% relative humidity, non-condensing												
Pan Size (W × D) (mm)	Ø 93	Ø 120		170 × 140				Ø 93	Ø 120	170 × 140			
Balance Dimensions - SJX/E (W × D × H) (mm)	202 × 222 × 103		202 × 224 × 54						N/A				
Balance Dimensions - SJX (W × D × H) (mm)	202 × 230 × 114		202 × 230 × 68				202 × 230 × 114		202 × 230 × 68				
Shipping Dimensions - SJX/E (W × D × H) (mm)	300 × 250 × 129		300 × 250 × 86				N/A						
Shipping Dimensions - SJX (W × D × H) (mm)	300 × 250 × 129												
Net Weight (SJX/E)	1 kg								N/A				
Net Weight (SJX)	1.1 kg		1.6 kg						1.1 kg		1.6 kg		
Shipping Weight (SJX/E)	1.5 kg								N/A				
Shipping Weight (SJX)	1.7 kg		2.2 kg						1.7 kg		2.2 kg		

\* Calibration weights are included with 323 models only.

\*\* Available weighing units and application modes vary by local regulations.

## Other Standard Features and Equipment

Transportation lock, stainless steel pan, menu & calibration lockout switch, slip-resistant and adjustable feet, leveling bubble, mechanical and software overload/underload protection, stability indicator, auto tare, low battery indicator, auto shut-off, user-selectable printing options, user-selectable communication settings.

## Compliance

- Product Safety: IEC/EN 61010-1; CAN/CSA C22.2 No. 61010-1; UL Std. No. 61010-1
- Electromagnetic Compatibility: IEC/EN 61326-1 Class B; FCC Part 15 Class B; Industry Canada ICES-003 Class B

## Accessories

RS232 Interface Kit	30268982	Printer, Impact, SF40A	30064202
USB Host Interface Kit (for Flash Drive)	30268983	Auxiliary Display, AD7-MD	30472063
USB Device Interface Kit (for PC)	30268984	Security Device	80850043
Bluetooth Interface Kit	30268985	Top Loading Kit for Density Determination***	30269020
Ethernet Interface Kit	30268986	Carrying Case	30269021
Stacking & Storage Cover (6)**	30268987	In-use Cover***	30269022
Stacking & Storage Cover (1)**	30268988		

\*\*Only fit for SJX/E models without draftshield.

\*\*\*Not fit for SJX InCal™ Models

OHAUS Europe GmbH  
Heuwinkelstrasse 3,  
8606 Nänikon,  
Switzerland

e-mail: ssc@ohaus.com  
Tel: 0041 22 567 53 19  
e-mail: tsc@ohaus.com  
Tel: 0041 22 567 53 20

[www.ohaus.com](http://www.ohaus.com)

OHAUS Corporation is an ISO  
9001:2015 manufacturer

ISO 9001:2015  
Registered Quality  
Management System

CH16B177

