



75kg and 200kg models available with large platform



The OHAUS SD Series Shipping Scale – Portability, Durability, OHAUS Quality and Value

The SD Series is a robust portable bench scale designed specifically with affordability, utility and everyday usage in mind. Ideal for home office, mail room, shipping and receiving, and general commercial and industrial weighing applications, the SD Series features durable painted steel treaded and non-treaded platforms, a remote indicator with two tactile function keys, battery operation and flexible mounting capabilities. The SD Series is your efficient solution to a variety of weighing needs, when you need it, where you need it.

Standard Features Include:

- 3 popular capacity models: Standard 35kg, 75kg and Large (L) 200kg
- 2 platform sizes: 316 x 280 mm and 520 x 400 mm
- Maximum displayed resolutions from 1:1750 to 1:2200
- ABS plastic indicator housing with reinforced ribs
- Universal table/wall mounting brackets included
- Flexible coiled cable, extendable
- Painted steel base - L models with smooth platform, S models with raised, embossed tread
- Rubber feet (adjustable on L models)
- LCD with fast weight display in kg or lb
- Simple 2 function raised tactile keys
- AC adapter or 360 hour battery operation with Auto-shut off feature
- Calibration in kg or lb
- Carry-handle on carton (non-L models) for ease of portability


SD Series Shipping Scale

Model	SD35	SD75	SD200	SD75L	SD200L
Capacity x Readability	35kg x 0.02kg	75kg x 0.05kg	200kg x 0.1kg	75kg x 0.05kg	200kg x 0.1kg
Maximum Displayed Resolution	1:1750	1:1650	1:2200	1:1650	1:2200
Calibration Weights (fixed)	25kg	50kg	100kg	50kg	100kg
Base Size	316L x 280W x 45H mm			520L x 400W x 75H mm	
Construction	ABS plastic indicator housing and mounting brackets Painted steel base - L models with smooth platform, S models with raised, embossed tread Rubber feet (adjustable on L models)				
Weighing Units	kg, lb				
Application Modes	Weigh, dynamic weighing / display hold				
Linearity / Repeatability	± 1d / 1d (std. dev.)				
Display	1-window, LCD, 20mm high, 4-digit, 7-segment				
Keyboard	2 function raised tactile mechanical switches: [ON/OFF Zero] / [UNITS Cal]				
Stabilization Time	≤ 3 seconds				
Cable Length	Extendable 1.8m / 72" to 2.7m / 108" (full extension)				
Operating Temperature	5° to 40°C / 10%-80% relative humidity, non-condensing				
Power	AC Adapter 9V DC / 100mA or 3 "C" alkaline batteries				
Battery Operating Time	360 hours				
Auto-Shut off	4 minutes with no activity (battery operation only)				
Safe Overload Capacity	150% of capacity				
Indicator Size	210L x 91W x 39H mm				
Shipping Dimensions	380L x 100W x 465H mm			600L x 480W x 230H mm	
Net Weight	2.6kg	3.3kg		14kg	
Shipping Weight	3.7kg	4.3kg		16kg	
Other Features	Calibrate in kg or lb, Calibration lock via internal switch				

Approvals

- **Electrical/Emissions:** Meets requirements of approval agencies: UL/CSA (adapter), FCC, CE Safety EN60950, EMC EN61326
- **Quality:** OHAUS quality management system registered to ISO 9001:2008

Outline Dimensional Drawings

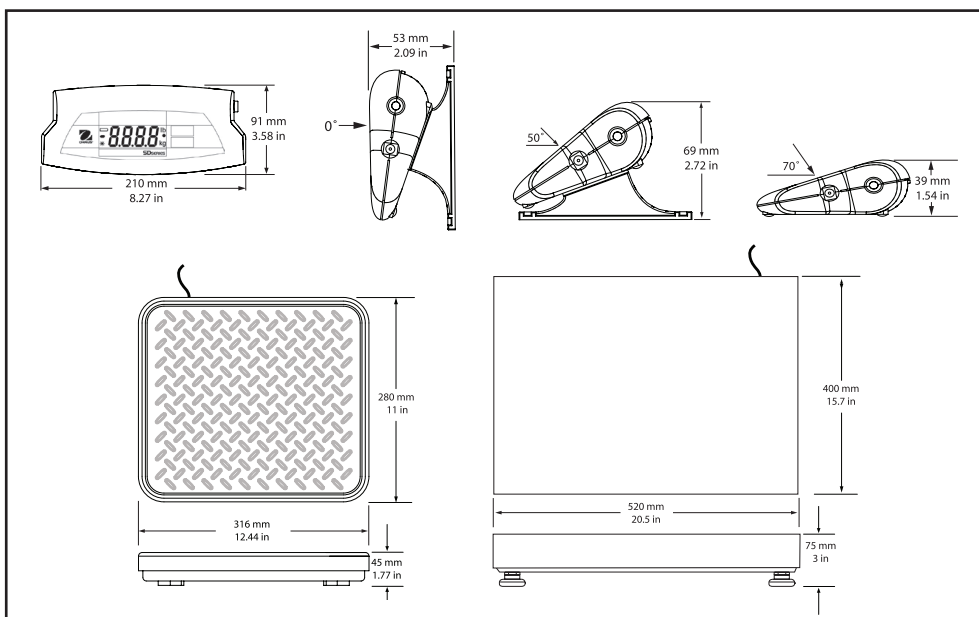

OHAUS Europe GmbH
Im Langacher 44
8606 Greifensee
Switzerland

e-mail: ssc@ohaus.com
Tel: 0041 22 567 53 19
e-mail: tsc@ohaus.com
Tel: 0041 22 567 53 20

www.ohaus.com
With oces throughout Europe,
Asia, and Latin America

ISO 9001:2008
Registered Quality
Management System



80774231_D © Copyright OHAUS Corporation

Supply & Distributed By:



WWW.WAGAGROUP.LK

WAGA Instrument (PVT) Ltd

275/B, Railway Road, Maharagama, Sri Lanka

+94 112 088 230 / +94 112 088 231

sales@wagagroup.lk