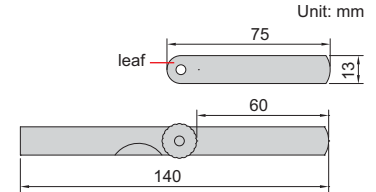


## FEELER GAGE


- Made of hardened alloy steel
- Meet DIN2275
- Accuracy:  $\pm(3+T/80)$   $\mu\text{m}$ ,  
'T' is the thickness of leaves in  $\mu\text{m}$


**4601-25**


Code	Range	Thickness of leaves included (mm)	Quantity of leaves
<b>4601-25</b>	0.04-1.00mm	0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00	25

## FEELER GAGES

- Made of hardened alloy steel
- Meet DIN2275
- Accuracy:  $\pm(3+T/80)$   $\mu\text{m}$ ,  
'T' is the thickness of leaves in  $\mu\text{m}$

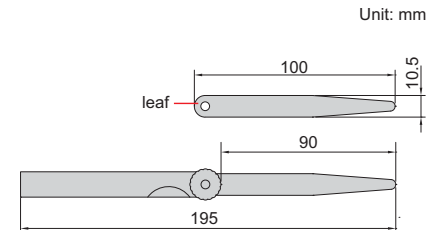
**4602-20**


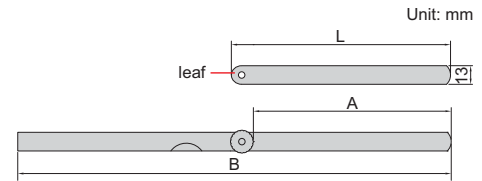
Code	Range	Thickness of leaves included (mm)	Quantity of leaves
<b>4602-13A</b>	0.03-0.50mm	0.03, 0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.15, 0.20, 0.30, 0.40, 0.50	13
<b>4602-13</b>	0.05-1.00mm	0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.40, 0.50, 0.60, 0.70, 0.80, 0.90, 1.00	13
<b>4602-17</b>	0.02-1.00mm	0.02, 0.03, 0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.15, 0.20, 0.25, 0.30, 0.40, 0.50, 0.75, 1.00	17
<b>4602-20</b>	0.05-1.00mm	0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00	20
<b>4602-28</b>	0.05-1.00mm	0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.11, 0.12, 0.13, 0.14, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00	28
<b>4602-32</b>	0.03-1.00mm	0.03, 0.04, 0.05, 0.06, 0.07, 0.08, 0.09, 0.10, 0.13, 0.15, 0.18, 0.20, 0.23, 0.25, 0.28, 0.30, 0.33, 0.35, 0.38, 0.40, 0.45, 0.50, 0.55, 0.60, 0.63, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 1.00	32

## LONG FEELER GAGES

- Made of hardened alloy steel
- Meet DIN2275
- Accuracy:  $\pm(3+T/80)$   $\mu\text{m}$ , 'T' is the thickness of leaves in  $\mu\text{m}$



4605-20



Code	Range	Thickness of leaves included (mm)	Quantity of leaves	L	A	B
4605-13	0.05-1.00mm	0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.40, 0.50, 0.60, 0.70, 0.80, 0.90, 1.00	13	150mm	135mm	295mm
4605-131	0.05-1.00mm		13	200mm	185mm	395mm
4605-132	0.05-1.00mm		13	300mm	285mm	590mm
4605-20	0.05-1.00mm	0.05, 0.10, 0.15, 0.20, 0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 0.95, 1.00	20	150mm	135mm	295mm
4605-201	0.05-1.00mm		20	200mm	185mm	395mm
4605-202	0.05-1.00mm		20	300mm	285mm	590mm

## INCH FEELER GAGE

11




4608-31

- 0.010" is made of brass, others are made of hardened alloy steel
- Each blade is marked with inch/metric size

Code	Range	Quantity of Leaves
4608-31	0.0015"~0.035"	32

Thickness of leaves included	Accuracy
0.010" (brass)	$\pm 0.00039"$
0.0015", 0.002"	$\pm 0.0002"$
0.0025", 0.003", 0.004", 0.005", 0.006", 0.007"	$\pm 0.00028"$
0.008", 0.009"	$\pm 0.00035"$
0.010", 0.011"	$\pm 0.00039"$
0.012", 0.013"	$\pm 0.00047"$
0.014", 0.015"	$\pm 0.00051"$

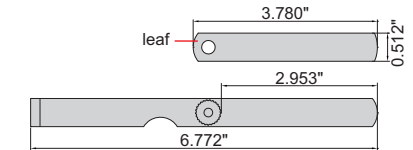


Thickness of leaves included	Accuracy
0.016", 0.017"	$\pm 0.00055"$
0.018", 0.019"	$\pm 0.00059"$
0.020", 0.021"	$\pm 0.00067"$
0.022", 0.023"	$\pm 0.00071"$
0.024", 0.025", 0.026"	$\pm 0.00075"$
0.028"	$\pm 0.00091"$
0.030"	$\pm 0.00094"$
0.032", 0.035"	$\pm 0.00102"$

## FEELER GAGE STOCKS

- Used as shims to accurately set spacing
- Made of hardened alloy steel
- Length 300mm
- Width 13mm
- 10 pcs per package



4622-10



Code	Thickness (T)	Accuracy	Code	Thickness (T)	Accuracy	Code	Thickness (T)	Accuracy
4622-02	0.02mm	$\pm 3\mu\text{m}$	4622-15	0.15mm	$\pm 5\mu\text{m}$	4622-60	0.60mm	$\pm 9\mu\text{m}$
4622-03	0.03mm	$\pm 3\mu\text{m}$	4622-18	0.18mm	$\pm 6\mu\text{m}$	4622-65	0.65mm	$\pm 9\mu\text{m}$
4622-04	0.04mm	$\pm 3\mu\text{m}$	4622-20	0.20mm	$\pm 6\mu\text{m}$	4622-70	0.70mm	$\pm 12\mu\text{m}$
4622-05	0.05mm	$\pm 3\mu\text{m}$	4622-25	0.25mm	$\pm 6\mu\text{m}$	4622-75	0.75mm	$\pm 12\mu\text{m}$
4622-06	0.06mm	$\pm 3\mu\text{m}$	4622-30	0.30mm	$\pm 7\mu\text{m}$	4622-80	0.80mm	$\pm 13\mu\text{m}$
4622-07	0.07mm	$\pm 4\mu\text{m}$	4622-35	0.35mm	$\pm 7\mu\text{m}$	4622-85	0.85mm	$\pm 13\mu\text{m}$
4622-08	0.08mm	$\pm 4\mu\text{m}$	4622-40	0.40mm	$\pm 8\mu\text{m}$	4622-90	0.90mm	$\pm 14\mu\text{m}$
4622-09	0.09mm	$\pm 4\mu\text{m}$	4622-45	0.45mm	$\pm 8\mu\text{m}$	4622-95	0.95mm	$\pm 14\mu\text{m}$
4622-10	0.10mm	$\pm 4\mu\text{m}$	4622-50	0.50mm	$\pm 9\mu\text{m}$	4622-100	1.00mm	$\pm 16\mu\text{m}$
4622-12	0.12mm	$\pm 5\mu\text{m}$	4622-55	0.55mm	$\pm 9\mu\text{m}$			


## FEELER GAGE TAPES

Code	Thickness (T)	Accuracy
4621-02	0.02mm	±4µm
4621-03	0.03mm	±4µm
4621-04	0.04mm	±4µm
4621-05	0.05mm	±4µm
4621-06	0.06mm	±4µm
4621-07	0.07mm	±5µm
4621-08	0.08mm	±5µm
4621-09	0.09mm	±5µm
4621-10	0.10mm	±5µm
4621-12	0.12mm	±5µm
4621-15	0.15mm	±6µm
4621-18	0.18mm	±7µm
4621-20	0.20mm	±8µm
4621-25	0.25mm	±9µm

Code	Thickness (T)	Accuracy
4621-30	0.30mm	±9µm
4621-35	0.35mm	±11µm
4621-40	0.40mm	±12µm
4621-45	0.45mm	±12µm
4621-50	0.50mm	±14µm
4621-55	0.55mm	±14µm
4621-60	0.60mm	±14µm
4621-65	0.65mm	±14µm
4621-70	0.70mm	±17µm
4621-75	0.75mm	±17µm
4621-80	0.80mm	±19µm
4621-85	0.85mm	±19µm
4621-90	0.90mm	±22µm
4621-95	0.95mm	±22µm
4621-100	1.00mm	±24µm



4621-30



- Used as shims to accurately set spacing
- Made of hardened alloy steel
- Length 5m
- Width 13mm