


CYLINDRICAL ANVIL TUBE MICROMETERS


- Measure wall thickness of tubes
- Graduation 0.01mm
- Ratchet stop
- Carbide spindle tip
- Supplied with setting standards (except 0-25mm)



3261-25A

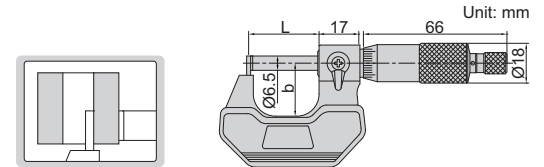

| (mm) | | | | | |
|-----------|---------|------|----------|----|----|
| Code | Range | Type | Accuracy | L | b |
| 3261-25A | 0-25mm | A | 6µm | 36 | 25 |
| 3261-50A | 25-50mm | A | 6µm | 61 | 32 |
| 3261-25BA | 0-25mm | B | 6µm | 36 | 25 |
| 3261-50BA | 25-50mm | B | 6µm | 61 | 32 |
| 3261-25CA | 0-25mm | C | 6µm | 36 | 25 |
| 3261-50CA | 25-50mm | C | 6µm | 61 | 32 |
| 3261-25DA | 0-25mm | D | 6µm | 36 | 25 |
| 3261-50DA | 25-50mm | D | 6µm | 61 | 32 |
| 3261-25EA | 0-25mm | E | 6µm | 36 | 25 |
| 3261-50EA | 25-50mm | E | 6µm | 61 | 32 |
| 3261-25FA | 0-25mm | F | 6µm | 36 | 25 |
| 3261-50FA | 25-50mm | F | 6µm | 61 | 32 |

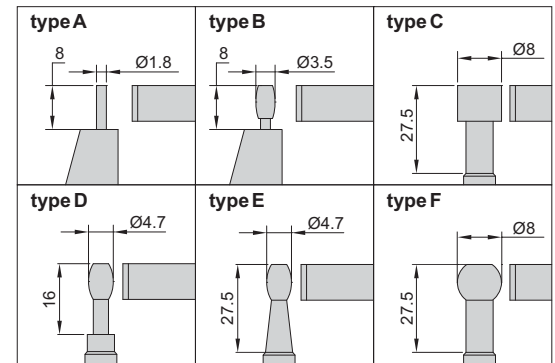

IP65
WATERPROOF


DATA
OUTPUT

DIGITAL CYLINDRICAL ANVIL TUBE MICROMETERS


- Measure wall thickness of tubes
- Resolution 0.001mm/0.00005"
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Carbide spindle tip
- Supplied with setting standards (except 0-25mm/0-1")
- Optional accessory: data output cable (code 7315-30, 7302-30)



3561-25A

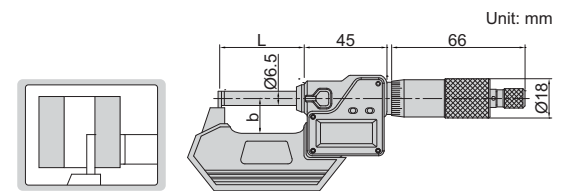

| (mm) | | | | | |
|-----------|--------------|------|----------|----|----|
| Code | Range | Type | Accuracy | L | b |
| 3561-25A | 0-25mm/0-1" | A | ±6µm | 36 | 25 |
| 3561-50A | 25-50mm/1-2" | A | ±6µm | 61 | 32 |
| 3561-25BA | 0-25mm/0-1" | B | ±6µm | 36 | 25 |
| 3561-50BA | 25-50mm/1-2" | B | ±6µm | 61 | 32 |
| 3561-25CA | 0-25mm/0-1" | C | ±6µm | 36 | 25 |
| 3561-50CA | 25-50mm/1-2" | C | ±6µm | 61 | 32 |
| 3561-25DA | 0-25mm/0-1" | D | ±6µm | 36 | 25 |
| 3561-50DA | 25-50mm/1-2" | D | ±6µm | 61 | 32 |
| 3561-25EA | 0-25mm/0-1" | E | ±6µm | 36 | 25 |
| 3561-50EA | 25-50mm/1-2" | E | ±6µm | 61 | 32 |
| 3561-25FA | 0-25mm/0-1" | F | ±6µm | 36 | 25 |
| 3561-50FA | 25-50mm/1-2" | F | ±6µm | 61 | 32 |


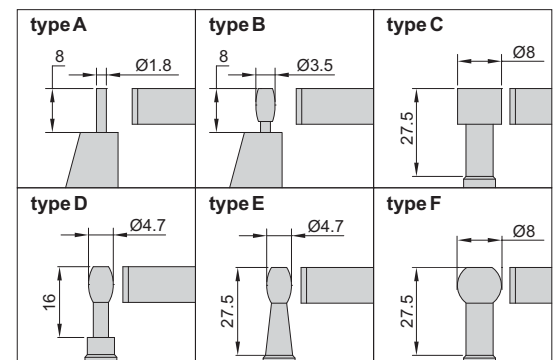


SPHERICAL ANVIL TUBE MICROMETERS



- Meet DIN863-3
- Measure wall thickness of tubes
- Graduation 0.01mm
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards (except 0-25mm)



3260-25A

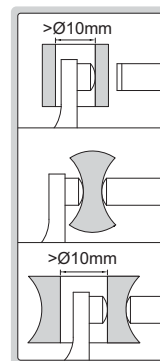

Unit: mm



| Code | Range | Type | Accuracy | L | b |
|------------|----------|------|----------|-----|------|
| 3260-25A | 0-25mm | A | 4μm | 32 | 24 |
| 3260-50A | 25-50mm | A | 4μm | 57 | 32 |
| 3260-75A | 50-75mm | A | 5μm | 82 | 44.5 |
| 3260-100A | 75-100mm | A | 5μm | 107 | 57 |
| 3260-25SA | 0-25mm | B | 4μm | 32 | 24 |
| 3260-50SA | 25-50mm | B | 4μm | 57 | 32 |
| 3260-75SA | 50-75mm | B | 5μm | 82 | 44.5 |
| 3260-100SA | 75-100mm | B | 5μm | 107 | 57 |

DIGITAL SPHERICAL ANVIL TUBE MICROMETERS



- Measure wall thickness of tubes
- Resolution 0.001mm/0.00005"
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, ABS/INC, data output
- Data output
- LR44 battery, automatic power off
- Ratchet stop
- Carbide measuring faces
- Supplied with setting standards (except 0-25mm/0-1")
- Optional accessory: data output cable (code 7315-30, 7302-30)

IP65
WATERPROOF



DATA
OUTPUT



3560-25A

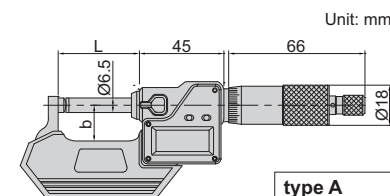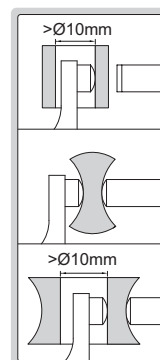

Unit: mm



| Code | Range | Type | Accuracy | L | b |
|------------|---------------|------|----------|-----|------|
| 3560-25A | 0-25mm/0-1" | A | ±4μm | 32 | 24 |
| 3560-50A | 25-50mm/1-2" | A | ±4μm | 57 | 32 |
| 3560-75A | 50-75mm/2-3" | A | ±5μm | 82 | 44.5 |
| 3560-100A | 75-100mm/3-4" | A | ±5μm | 107 | 57 |
| 3560-25SA | 0-25mm/0-1" | B | ±4μm | 32 | 24 |
| 3560-50SA | 25-50mm/1-2" | B | ±4μm | 57 | 32 |
| 3560-75SA | 50-75mm/2-3" | B | ±5μm | 82 | 44.5 |
| 3560-100SA | 75-100mm/3-4" | B | ±5μm | 107 | 57 |