


NON-ROTATING SPINDLE UNIVERSAL MICROMETERS

NON-ROTATING SPINDLE



3280-25A

- Meet DIN863-3
- Graduation 0.01mm
- Non-rotating spindle
- Ratchet stop
- Supplied with 7 pairs of anvil/spindle tip
- Setting standards are included (except 0-25mm)
- Optional accessory: 55° anvil/spindle tip (code 3280-SP1 and 3280-SP2)

| Code | Range | Accuracy | L | b |
|-----------|-----------|----------|-------|-------|
| 3280-25A | 0-25mm | 4µm | 42mm | 26mm |
| 3280-50A | 25-50mm | 4µm | 67mm | 38mm |
| 3280-75A | 50-75mm | 5µm | 92mm | 50mm |
| 3280-100A | 75-100mm | 5µm | 118mm | 62mm |
| 3280-125A | 100-125mm | 6µm | 143mm | 70mm |
| 3280-150A | 125-150mm | 6µm | 168mm | 82mm |
| 3280-175A | 150-175mm | 7µm | 192mm | 95mm |
| 3280-200A | 175-200mm | 7µm | 217mm | 107mm |

Anvil/spindle tip (included)

Unit: mm

| | | |
|------------|--|--|
| Flat | | |
| Spherical | | |
| Spline | | |
| Disk | | |
| Blade | | |
| Knife-edge | | |
| Point | | |

55° anvil/spindle tip (optional)

Unit: mm

| | | |
|-----------------------------|--|--|
| Code 3280-SP1 Knife-edge | | |
| Code 3280-SP2 Point | | |

DIGITAL UNIVERSAL MICROMETERS

Anvil/spindle tip (included) Unit: mm

| | | |
|------------|--|--|
| Flat | | |
| Spherical | | |
| Spline | | |
| Disk | | |
| Blade | | |
| Knife-edge | | |
| Point | | |

55° anvil/spindle tip (optional) Unit: mm


| | | |
|-----------------------------|--|--|
| Code 3280-SP1 Knife-edge | | |
| Code 3280-SP2 Point | | |



3580-25A

DATA OUTPUT

NON-ROTATING SPINDLE

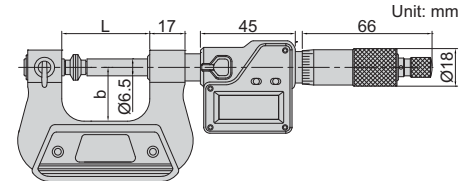

Unit: mm

- Resolution 0.001mm/0.00005"
- Non-rotating spindle
- Button function: on/off, set, mm/inch, ABS/INC
- Data output
- LR44 battery
- Automatic power off
- Ratchet stop
- Supplied with 7 pairs of anvil/spindle tip
- Setting standards are included (except 0-25mm/0-1")
- Optional accessory: 55° anvil/spindle tip code 3280-SP1 and 3280-SP2, data output cable (code 7315-30, 7302-30)

| Code | Range | Accuracy | L | b |
|-----------|----------------|----------|-----|-----|
| 3580-25A | 0-25mm/0-1" | ±4µm | 42 | 26 |
| 3580-50A | 25-50mm/1-2" | ±4µm | 67 | 38 |
| 3580-75A | 50-75mm/2-3" | ±5µm | 92 | 50 |
| 3580-100A | 75-100mm/3-4" | ±5µm | 118 | 62 |
| 3580-125A | 100-125mm/4-5" | ±6µm | 143 | 70 |
| 3580-150A | 125-150mm/5-6" | ±6µm | 168 | 82 |
| 3580-175A | 150-175mm/6-7" | ±7µm | 192 | 95 |
| 3580-200A | 175-200mm/7-8" | ±7µm | 217 | 107 |