



FILLING MACHINE SERIES

灌装机系列

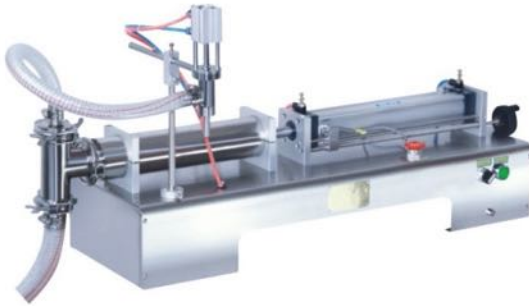

G1WY 单头液体灌装机
G1WY ONE HEAD LIQUID FILING MACHINE

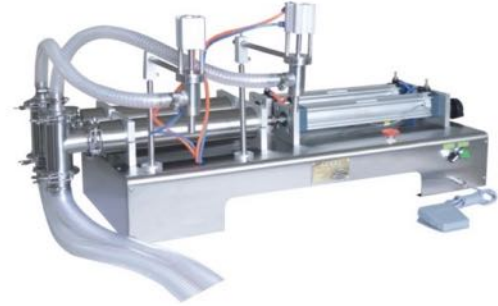

G2WY 双头液体灌装机
G2WY DOUBLE HEADS LIQUID FILING MACHINE



G1WG 单头膏体灌装机
G2WG ONE HEAD PASTE FILING MACHINE



G2WG 双头膏体灌装机
G2WG DOUBLE HEADS PASTE FILING MACHINE



液体灌装机
FILING MACHINE



落地式膏体灌装机
FLOOR PASTE FILING MACHINE

FILLING MACHINE SERIES

灌装机系列



U型灌装机
U TYPE FILLING MACHINE



G1WG 膏体气动灌装机带加热带搅拌
PNEUMATIC PASTE FILLING MACHINE
WITH HEATING AND STIRRING

技术参数 / Technical Parameters

型号	Model	单头液体/G1WY	双头液体/G2WY	单头膏体/G1WG	双头膏体/G2WG
电源	Power Supply	AC220V/110V 50/60HZ			
功率(w)	Power	20	50	20	50
空气压力(Mpa)	Air Pressure	0.4-0.6			
灌装速度(pcs/min)	Filling Speed	5-25	10-50	5-25	10-50
灌装精度	Filling Accuracy	± 1%			
可选机型(ml)	Optional Models	5-100 10-300			



简易理瓶机
SIMPLE BOTTLE MACHINE



SY-100 自动箱式理瓶机
AUTOMATIC BOX-TYPE BOTTLE MACHINE

FILLING MACHINE SERIES 灌装机系列



A02 气动灌装机
PNEUMATIC FILLING MACHINE



A03 手动灌装机
MANUAL FILLING MACHINE

性能及特点 / Performance and Features

- ◆ A03手动灌装机采用活塞式结构，可对液体、膏体等物料进行5-50g定量灌装，该机结构紧凑、操作方便、计量精确，机体与物料接触部分均采用不锈钢以及聚四氟制作，具有耐磨、抗腐蚀等特点。
- ◆ A02型气动灌装机是在A03型手动灌装机的基础上加以改进，以压缩空气为动力，使操作更加方便。
- ◆ 该产品适用于医院、实验室、美容院、日化行业及中小型企业等单位的小剂量灌装工作，是理想的高体液体灌装设备。
- ◆ A03 manual filling machine adopts piston type structure, which can do quantitative filling of 5-50g for liquids, pastes and other materials. The machine has a compact structure, convenient operation and accurate measurement. The contact part of the body and the material is made of stainless steel and poly Made of fluorine, with abrasion and corrosion resistance.
- ◆ The A02 pneumatic filling machine is improved on the basis of the A03 manual filling machine. It uses compressed air as the power to make the operation more convenient.
- ◆ This product is suitable for small-dose filling work in hospitals, laboratories, beauty salons, daily chemical industries, and small and medium-sized enterprises. It is an ideal paste liquid filling equipment.

技术参数 / Technical Parameters

工作方式	Working Mode	手动/Hand pressure
灌装速度	Filling Speed	20-30blts/min
灌装范围	Filling Range	5-50ml
灌装嘴直径	Diameter of Nozzle	4mm/8mm
灌装精度	Filling Accuracy	± 1mm
料斗容量	Hopper Capacity	10L
外形尺寸	Dimensions(LxWxH)	270x270x700mm
整机重量	Total Weight	12Kg

工作方式	Working Mode	自动/Pneumatic
灌装速度	Filling Speed	20-60blts/min
灌装范围	Filling Range	5-50ml
灌装嘴直径	Diameter of Nozzle	4mm/8mm
计量精度	Measurement Accuracy	0.2-1ml
料斗容量	Hopper Capacity	10L
外形尺寸	Dimensions(LxWxH)	270x270x700mm
整机重量	Total Weight	15Kg
工作气压	Working Pressure	0.4-0.6Mpa



SYGZL60 隔膜泵灌装机
DIAPHRAGM PUMP FILLING MACHINE

技术参数 / Technical Parameters

型号	Model	SYGZL60
功率	Power	0.6Kw
适用瓶颈	Applicable Bottleneck	4mm以上
罐装量	Canned Quantity	0-1000ml
生产能力	Production Capacity	20-50罐/分钟
适用瓶高	Applicable Bottle Height	20-300mm
整机重量	Total Weight	40Kg

FILLING MACHINE SERIES

灌装机系列



小计量迷你灌装机
SMALL METERING MINI FILLING MACHINE



小型称重灌装机
SMALL WEIGHING FILLING MACHINE



4头/6头/8头/11头隔膜泵灌装机
4 HEADS/6 HEADS/8 HEADS/11 HEADS
DIAPHRAGM PUMP FILLING MACHINE



单头蠕动泵灌装机
SINGLE HEAD PERISTALTIC
PUMP FILLING MACHINE



双头蠕动泵灌装机
2 HEADS PERISTALTIC
PUMP FILLING MACHINE



SYG63A 灌油灌装机
OIL FILLING MACHINE



耐腐蚀物料灌装机
CORROSION RESISTANT MATERIAL FILLING MACHINE

FILLING MACHINE SERIES

灌装机系列

性能及特点 / Performance and Features

- ◆ 适用于化工、食品、日化、等行业的液体、膏体等物质的灌装。外观由不锈钢材料制成，活塞由聚四氟乙烯材料制成，气动部分均采用进口气动元件，符合GMP要求。
- ◆ Applicable to chemical, food, cosmetic, and other industries of liquid, paste and other substances filling. The appearance is made of stainless steel, the piston is made of polytetrafluoroethylene material, pneumatic parts are imported pneumatic components, in line with GMP requirements.

技术参数 / Technical Parameters

型号	Model	GFA-100	GFA-300	GFA-500	GFA-1000
灌装量	Filling Volume	10-100ml	30-300ml	50-500ml	50-1000ml
灌装精度	Filling Accuracy	< ± 1.5%			
生产能力	Production Capacity	1-30pcs/min			
配用气量	With gas Consumption	≥ 0.1m ³ /min			
配用气压	Equipped With Air Pressure	0.4Mpa			
重量	Weight	50kg			




气动膏液两用灌装机
DUAL PNEUMATIC
LIQUID CREAM FILLING MACHINE

性能及特点 / Performance and Features

- ◆ 物料接触部分均采用304#不锈钢材料制成，符合GMP要求。
- ◆ 灌装量和灌装速度均可任意调节，灌装精度高。
- ◆ 灌装闷头采用防滴漏及升降灌装装置。
- ◆ The material contact parts are made of 304 # stainless steel, in line with GMP requirements.
- ◆ Filling volume and filling speed can be adjusted, filling high precision.
- ◆ Filling the bulkhead with anti-drip and lifting filling device.

技术参数 / Technical Parameters

灌装范围	Filling Range	50-500ml
灌装速度	Filling Speed	8-12支
气源	Gas Source	0.5-0.8Mpa
适用范围	Applicable Scope	单管/双管 Single/Double nozzle

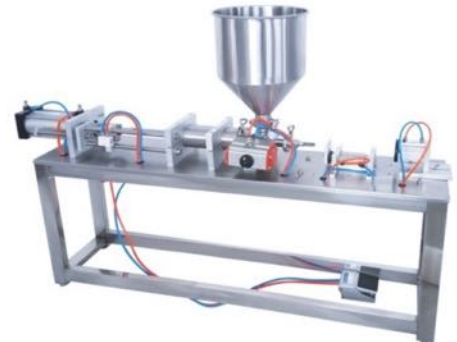

美缝剂灌装机
DOUBLE TUBE US SEWING
AGENT FILLING MACHINE

性能及特点 / Performance and Features

- ◆ 灌装容量的方式是控制液面的高度。
- ◆ 对瓶子的形状没有严格要求构造简单，易操作和保养。
- ◆ 纯气动机械符合抗爆炸要求。
- ◆ 装有自动排水系统。
- ◆ The filling capacity of the way is to control the height of the liquid level.
- ◆ The shape of the bottle is not strictly required structure is simple, easy to operate and maintenance.
- ◆ Pure pneumatic machinery in line with anti-explosive requirements.
- ◆ Equipped with automatic drainage system.

技术参数 / Technical Parameters

灌装范围	Filling Range	2ml-无限量
灌装速度	Filling Speed	单头20瓶左右 About 20 bottles/min for single nozzle
气源	Gas Source	0.5-0.8Mpa
黏度范围	Viscosity Range	< 20Cps (静态黏度)



香水灌装机/双头/四头
PERFUME FILLING MACHINE
/ DOUBLE / FOUR