


# VACUUM PACKAGING MACHINE SERIES

## 真空包装机系列


### 性能及特点 / Performance and Features

- ◆ 本系列真空包装机具有抽真空，封口，印字，冷却一次性完成，本产品适用于食品，药品，水产，化工原料，电子元件等产品的真空包装，可防止产品的氧化，霉变，防腐，防潮，保质，保鲜，延长产品的储存期限。
- ◆ DZ系列台式真空包装机具有体积小，耗电省，抽气时间短等特点，适用于小型物品的包装。
- ◆ 其中DZ-260/PD还适用于货币和财务单据、凭证等资料的真空包装，可以防潮防霉延长保管期。
- ◆ This series of vacuum packing machine is featured by automatic processing of vacuuming, sealing, printing, cooling, which is used in vacuum packing of the food, pharmaceutical, aquatic, chemical and electronic industries. It can prevent the products from oxidization and mildew, as well as corrosion and moisture, keeping the quality and freshness and prolonging the storage time.
- ◆ It is a machine that is compact, electricity saving and short vacuum time, which is suitable for small size object packing.
- ◆ DZ-260/PD are also suitable for packing money and financial documents, voucher etc. It packed products can be prevented getting damp, going mould, insect and prolonged the storage period.

DZ-260/PD 台式真空包装机  
TABLE-STYLE VACUUM PACKAGING MACHINE

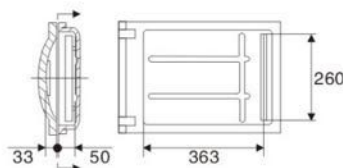

DZ-400/2E 单室真空包装机  
SINGLE CHAMBER VACUUM PACKAGING MACHINE

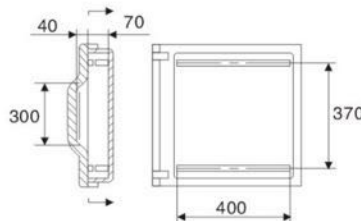

### 技术参数 / Technical Parameters

型号	Model	DZ-260/PD	DZ-400/2E
电源电压(V/Hz)	Voltage	AC 220/50 110/60	
真空泵电机功率(W)	Motor Power	370	1000
热封功率(W)	Sealing Power	180	600
真空室最低绝对压强(KPa)	Ultimate Vacuum Pressure	1	1
每室热封条数	No. of Sealing Bars for Each Chamber	1	2
真空室尺寸(LxWxH)(mm)	Chamber Dimension	390x285x50	435x420x75
热封条长度(mm)	Sealing Length	260	400
热封宽度(mm)	Sealing Width	10	10
真空泵排气量(m <sup>3</sup> /h)	Vacuum Pump Rate	6.5	20
真空室材质	Material for Vacuum Chamber	不锈钢 Stainless steel	
外形尺寸(L xWxH)(mm)	Dimension	500x340x360	540x490x950
净重(kg)	Net Weight	29	62

注：我公司可按客户要求定做真空设备。  
Note: Our customers can request custom vacuum equipment.

# VACUUM PACKAGING MACHINE SERIES


## 真空包装机系列



DZ-500/2E 单室真空包装机  
VACUUM PACKAGING MACHINE



DZ-600/2E(D)



### 性能及特点 / Performance and Features

- ◆ 液晶版真空包装机为我公司独立研发，生产的真空包装机，我公司该机型为全国首创，具有可视界面操作，可中英文切换，使用方便，调试简单，故障报警等自动化功能，更加易于操作，维护。本设备故障率低，运行稳定将替代上一代电脑版真空机，解决了维修难，保养难的问题。
- ◆ DZ系列真空包装机具有体积小，耗电省，抽气时间短等特点，适用于小型物品的包装。
- ◆ 图为DZ-500/2E液晶版单室真空包装机，其中DZ-600/2E(D)为单条边封口，适用于稍大点的产品包装。
- ◆ DZ-500/2E LCD version of vacuum packaging machine has to operate, voice Prompts automatic fan it a Jarm function more easy to open rate and maintain The equipment failure rate is low, stable operation will replace the Previous generation of version of a vacuum machine to solve the difficult repair, maintenance difficult problem.
- ◆ It is a machine that is compact, electricity saving and short vacuum time, which is suitable for small size object packing.
- ◆ DZ-600/2E(D) as a One single side seal, slightly larger point for product packaging.

### 技术参数 / Technical Parameters


型号	Model	DZ-500/2E	DZ-600/2E
电源电压(V/Hz)	Voltage	AC 220/50 110/60	AC 380/50
真空泵电机功率(W)	Motor Power	1000	1000
热封功率(W)	Sealing Power	700	800
真空室最低绝对压强(KPa)	Ultimate Vacuum Pressure	1	1
每室热封条数	No. of Sealing Bars for Each Chamber	2	2
真空室尺寸(LxWxH)(mm)	Chamber Dimension	525x525x75	630x630x100
热封条长度(mm)	Sealing Length	500	600
热封宽度(mm)	Sealing Width	10	10
真空泵排气量(m <sup>3</sup> /h)	Vacuum Pump Rate	20	20
真空室材质	Material for Chamber	不锈钢 Stainless steel	
外形尺寸(LxWxH)(mm)	Dimension	650x575x980	760x690x980
净重(kg)	Net Weight	80	111

注：我公司可按客户要求定做真空设备。  
Note: Our customers can request custom vacuum equipment.




# VACUUM PACKAGING MACHINE SERIES

## 真空包装机系列

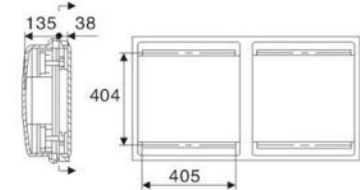

DZ-400/2SA

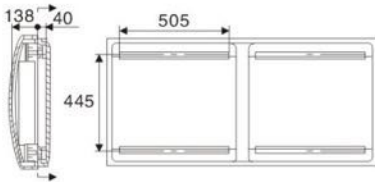

DZ-500/2SB



DZ-400/2SB 双室真空包装机  
DOUBLE CHAMBERS  
VACUUM PACKAGING MACHINE



DZ-500/2SB 双室真空包装机  
DOUBLE CHAMBERS  
VACUUM PACKAGING MACHINE

### 性能及特点 / Performance and Features

- ◆ DZ系列真空包装机和DZQ系列真空充气包装机，只需按下真空室盖即可按设定的程序完成抽真空或抽真空后充入惰性气体，封口、印字、冷却、排气的全过程。经真空或真空充气包装后的物品可防止氧化、霉变、虫蛀、受潮、延长产品储存期限。
- ◆ As long as you press the vacuum case's lid, the machine will automatically complete orderly the assumed processes of vacuum extraction, sealing, printing, cooling and aeration. The packed products can be prevented from oxidation, going mould, insects or getting damp, thus can be kept fresh in a prolonged storage period.

### 技术参数 / Technical Parameters

型号	Model	DZ-400/2SB	DZ-500/2SB
电源电压(V/Hz)	Voltage	AC 380/50 220/50	AC 380/50 220/50
真空泵电机功率(W)	Motor Power	1000	2000
热封功率(W)	Sealing Power	700	800
真空室最低绝对压强(KPa)	Ultimate Vacuum Pressure	1	1
每室热封条数	No. of Sealing Bars for Each Chamber	2	2
真空室尺寸(LxWxH)(mm)	Chamber Dimension	460x460x140	540x420x150
热封条长度(mm)	Sealing Length	400	500
热封宽度(mm)	Sealing Width	10	10
真空泵排气量(m <sup>3</sup> /h)	Vacuum Pump Rate	20	20*2
真空室材质	Material for Vacuum Chamber	不锈钢 Stainless steel	不锈钢 Stainless steel
外形尺寸(L xWxH)(mm)	Dimension	1050x560x920	1250x650x950
净重(kg)	Net Weight	140	186

注：我公司可按客户要求定做真空设备。  
Note: Our customers can request custom vacuum equipment.

# VACUUM PACKAGING MACHINE SERIES

## 真空包装机系列

### 性能及特点 / Performance and Features

- ◆ DZ系列真空包装机和DZQ系列真空充气包装机，只需按下真空室盖即可按设定的程序完成抽真空或抽真空后充入惰性气体，封口、印字、冷却、排气的全过程。经真空或真空气调包装后的物品可防止氧化、霉变、虫蛀、受潮、延长产品储存期限。
- ◆ DZS-600/2SB为工作室加深产品，专为水产，粮食等行业准备的大型包装机。
- ◆ As long as you press the vacuum case's lid, the machine will automatically complete orderly the assumed processes of vacuum extraction, sealing, printing, cooling and aeration. The packed products can be prevented from oxidation, going mould, insects or getting damp, thus can be kept fresh in a prolonged storage period.
- ◆ DZS-600/2SB is a large packing machine specially designed for aquatic products, grain and other industries.



DZ-600/2SB 双室真空包装机  
DOUBLE CHAMBERS  
VACUUM PACKAGING MACHINE



DZS-600/2SB 双室真空包装机  
DOUBLE CHAMBERS  
VACUUM PACKAGING MACHINE

### 技术参数 / Technical Parameters

型号	Model	DZ-600/2SB	DZS-600/2SB
电源电压(V/Hz)	Voltage	AC 380/50 220/50	AC 380/50 220/50
真空泵电机功率(W)	Motor Power	2000	2250
热封功率(W)	Sealing Power	1000	1600
真空室最低绝对压强(KPa)	Ultimate Vacuum Pressure	1	1
每室热封条数	No. of Sealing Bars for Each Chamber	2	2
真空室尺寸(LxWxH)(mm)	Chamber Dimension	670x540x140	670x550x400
热封条长度(mm)	Sealing Length	600	600
热封宽度(mm)	Sealing Width	10	12
真空泵排气量(m <sup>3</sup> /h)	Vacuum Pump Rate	20*2	60
真空室材质	Material for Vacuum Chamber	不锈钢 Stainless steel	不锈钢 Stainless steel
外形尺寸(L xWxH)(mm)	Dimension	1450x650x980	1450x550x1000
净重(kg)	Net Weight	205	305

注：DZS为工作室加深机型，我公司可按客户要求定做真空设备。

Note: DZS model for studio deepened my company customers can request custom vacuum equipment.



# VACUUM PACKAGING MACHINE SERIES

## 真空包装机系列



DZ-660/2E 大米真空机  
RICE VACUUM MACHINE



DZ-850/2E 大米真空机  
RICE VACUUM MACHINE

### 技术参数 / Technical Parameters

型号	Model	DZ-600/2E	DZ-850/2E
电源电压(V/Hz)	Voltage	AC220/50	AC220/50
真空泵电机功率(W)	Motor Power	1000	1000
热封功率(W)	Sealing Power	1200	1600
真空室最低绝对压强(KPa)	Ultimate Vacuum Pressure	1	1
每室热封条数	No. of Sealing Bars for Each Chamber	2	2
真空室内槽尺寸(LxWxH)(mm)	Chamber Dimension	680x210x350	870x200x350
热封条长度(mm)	Sealing Length	660	850
热封宽度(mm)	Sealing Width	10	10
真空泵排气量(m <sup>3</sup> /h)	Vacuum Pump Rate	20*1	20*1
真空室材质	Material for Vacuum Chamber	不锈钢 Stainless steel	不锈钢 Stainless steel
外形尺寸(L xWxH)(mm)	Dimension	740x480x800	940x480x800
净重(kg)	Net Weight	88	100
两条封口之间的有效距离(mm)	Effective Distance Between Two Seals	185	185

注：我公司可按客户要求定做真空设备。  
Note: Our customers can request custom vacuum equipment.



HG0345 家用小型真空机  
SMALL HOUSEHOLD VACUUM MACHINE



LP-1805 家用小型真空机  
SMALL HOUSEHOLD VACUUM MACHINE

# VACUUM PACKAGING MACHINE SERIES

## 真空包装机系列

### 性能及特点 / Performance and Features

新型抽气封口机具有抽气充气封口功能，具有单独封口不受包装物尺寸大小影响，真空封口，充气封口功能，一机多用，功能强大，操作简单，省力、快速、低价格、易维护等特点，可用于食品、医药、土特产、电器、五金电子元件、服装、棉被等行业真空、充气物品包装。

The new type of suction sealing machine has soot sealing function, with a separate seal from the size of packaging materials, vacuum sealing, inflatable sealing function, a multi-purpose machine, powerful, simple, effort, fast, low price, easy maintenance and soon, Can be used for food, medicine, native products, electrical, hardware electronic components, clothing, quilts and other industries vacuum, inflatable items packaging.



DZ-600/L 外抽式真空包装机  
DZ-600/L2 外抽式真空包装机  
VACUUM SEALING MACHINE

### 技术参数 / Technical Parameters

型号	Model	DZ-600/L	DZ-600/L2
电源	Power Supply	220V/50Hz	
热封功率	Sealing Power	0.8kw	
泵功率	Pump Power	0.45kw	
封口长度	Sealing Length	500mm	
封口时间	Sealing Time	0-6s	
抽气时间	Extraction Time	0-99s可调	

充气时间	Inflation Time	0-99s
冷却时间	Cooling Time	0-9s
极限真空度	Ultimate Vacuum	≤1.332kp
工作台尺寸	Table Size	550x350mm
外形尺寸	Dimensions	550x500x430mm
毛重/净重	Gw/Nw	40kg/34kg



连续真空封口机  
CONTINUOUS VACUUM SEALING MACHINE

### 技术参数 / Technical Parameters

型号	Model	真空包装封口机
电源	Power Supply	380V/50Hz
真空室尺寸	Vacuum Chamber Size	1125x 500x120
效率	Efficiency	240-360次/小时